


KT-47 SERIES



Dimensions


KT-47R, KT-47N, KT-47P /
KT-47R-QD, KT-47N-QD, KT-47P-QD

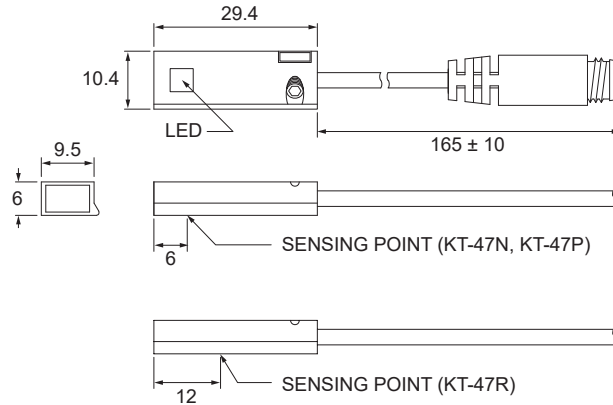


Unit : mm

QD Pinout


3 wire QD wiring



2 wire QD wiring



2 wire EQD wiring



Specifications

MODEL	KT-47R	KT-47N	KT-47P
Connect Diagram			
Characteristics			
Wiring Method	2-Wire Type	3-Wire Type	
Switching Logic	SPST, Normally Open	Solid State Output, Normally Open	
Sensor Type	Reed Switch	NPN Current Sinking	PNP Current Sourcing
Operating Voltage	5 ~ 240 V DC / AC	5 ~ 30 V DC	
Switching Current	500 mA max.	200 mA max.	
Contact Rating ※1	10 W max.	6 W max.	
Current Consumption ※2	-	22 mA @ 24 V DC max.	20 mA @ 24 V DC max.
Voltage Drop ※2	3.0 V max.	2.0 V max.	2.5 V max.
Leakage Current ※2	-	0.01 mA max.	
Indicator	Yellow LED		
Lead Wire	Ø2.8 PVC - 26AWG (0.15 mm ²) - 2 cores	Ø2.8 PUR - 26AWG (0.15 mm ²) - 3 cores	
Operating Frequency	200 Hz	1000 Hz	
Magnet Requirement ※2, 3	50 Gauss		
Temperature Range	-10 ~ 70 °C		
Shock ※4	30 G	50 G	
Vibration ※5	9 G		
Enclosure	IEC 60529 IP67		
Protection Circuit ※6	1	2, 3, 4	

NOTE

※1 : WARNING : Never exceed rating (Watt = Voltage × Amperage).
Permanent damage to sensor will occur.

※2 : It bases on conditions of voltage 24 V DC, ambient temp. 25 °C and 2 meters cable of sensor. Voltage drop increases in pace with cable length.




※3 : Measuring standard target : Ø15.5 × Ø8 × 5t (Anisotropy rubber magnet)

※4 : Sin wave / X, Y, Z 3 directions / 3 times each direction / 11 ms each time.

※5 : Double amplitude 1.5 mm / 10 Hz ~ 55 Hz ~ 10 Hz (Sweep 1 min) / X, Y, Z 3 directions / 1 hour each time.

※6 : 1 = None / 2 = Short-circuit / 3 = Power Source Reverse polarity / 4 = Surge Suppression

Groove Dimensions

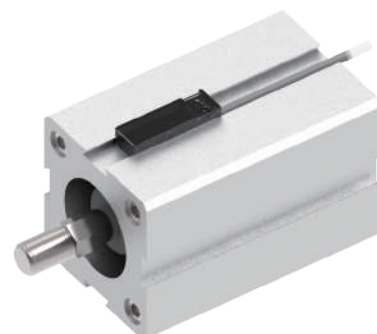

Unit : mm